



Place charcoal filter on back-side of baffle filter. And place filter brackets over charcoal filter and secure in place by tucking each end of bracket under the baffle filter frame. Re-install baffle filter.

Remove all black foam from filter opening before installing the charcoal filter brackets.

INCLUDED MATERIALS



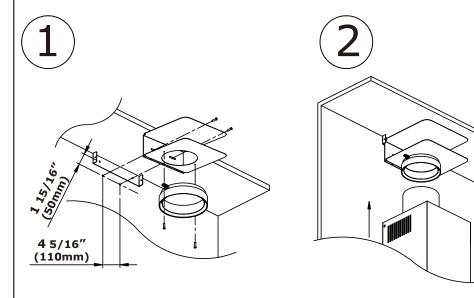





Follow instructions in hood manual to enable the "replace charcoal filter" indicator on the hood controls.