




CBE-1000
(external)

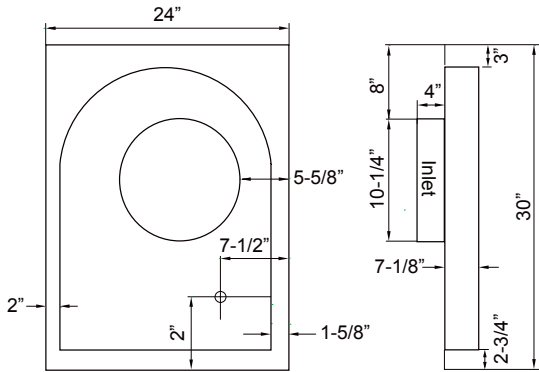

PBN-1000A
(in-line)

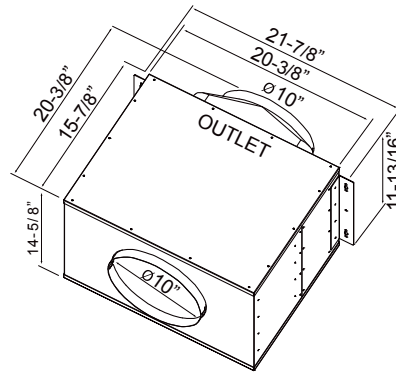

DBI-600A
(internal/in-line)

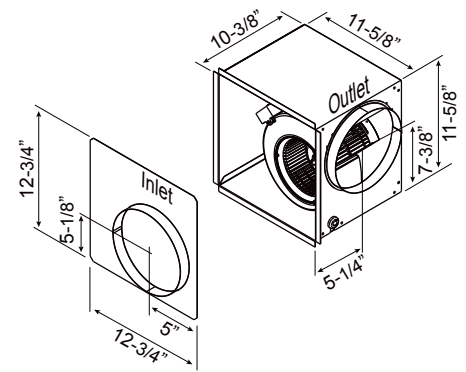

BLOWERS

| MODEL | BLOWER TYPE | MAX WATTS* | MAX AMPS* | CFM | SONES | COMPATIBLE MODELS |
|---------------|------------------|------------|-----------|-------------|---------|-------------------------------------------------------------|
| CBI-290C | Single Internal | 77 | 0.75 | 200 - 290 | 1.4 - 3 | AK8300BSX, Designer Collection |
| CBI-390A | Single Internal | 255 | 2.1 | 200 - 390 | 1.4 - 5 | AK8300BSX, Designer Collection |
| CBI-600A | Single Internal | 320 | 2.75 | 240 - 600 | 1.8 - 6 | AK8300BSX, Designer Collection |
| DBI-600A | Internal/In-Line | 340 | 3.0 | 200 - 600 | NA | DLI-ExxASX |
| PBI-1100B | Dual Internal | 640 | 5.45 | 500 - 1,100 | 3.5 - 8 | AK8300BSX, ALU-ExxCxX |
| PBI-1100B-DME | Dual Internal | 640 | 5.4 | 500 - 1,100 | 3.5 - 8 | DME-E48AxxX |
| PBD-1200A | Dual Internal | 660 | 5.8 | 400 - 1,200 | 3.5 - 9 | AK70xxCS, AK75xxCS |
| PBD-1300B | Dual Internal | 490 | 8.0 | 350 - 1,300 | 1 - 8 | AK7336AS, AK74xxAS, AK76xxBS, AK77xxBS, AK94xxBS, ZRP-ExxBS |
| CBE-1000** | External | 640 | 5.45 | 500 - 1,000 | NA | AK8300BSX, Designer Collection |
| PBN-1000A** | In-Line | 700 | 6.25 | 500 - 1,000 | NA | AK8300BSX, Designer Collection |

*Add blower Watts and Amps to AC Power details from hood spec sheet to determine total power consumption.

**For Designer Collection hoods you must transition from 10" to 8" ducting before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

The exception to this is ALU-ExxCxX which uses a 10" round.