

DESIGNER

LAYERS



WALL

DESIGNER:
ROBERT BRUNNER


A streamlined fusion of black or white glass and stainless steel with a light, floating effect are sandwiched together in a reimagining of the classic range hood. Now available with a tri-level LED light strip.

ZEPHYR

ZEPHYRONLINE.COM

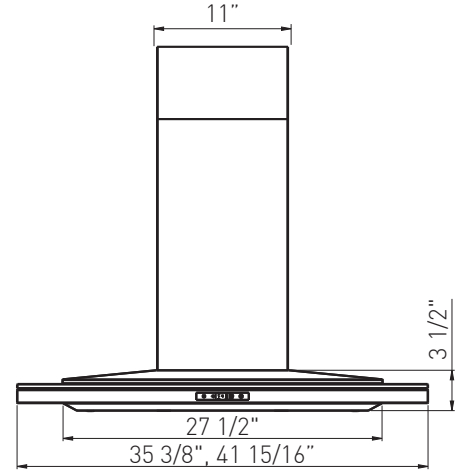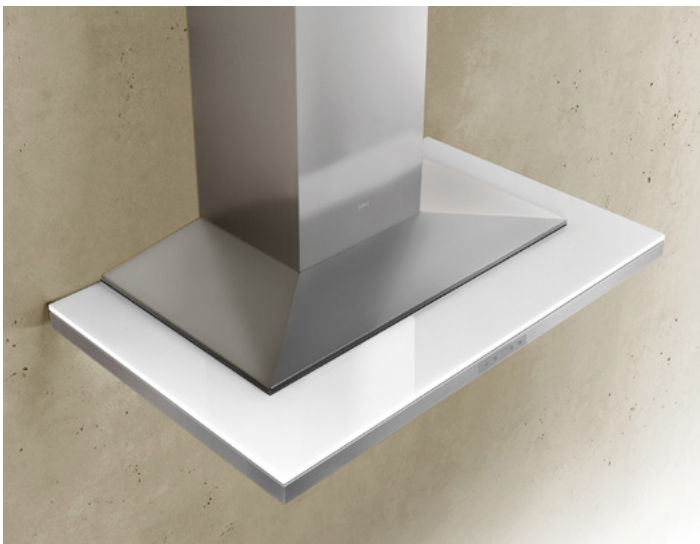


Front

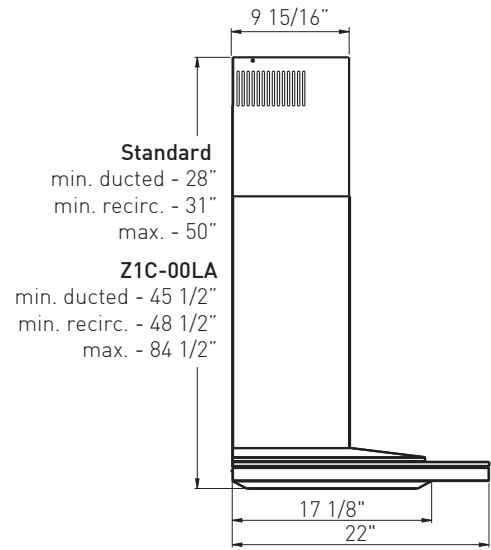

Side



Wireless Remote Control

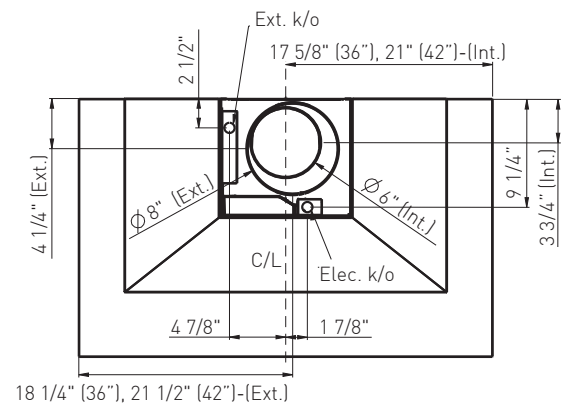

Top

DESIGNER:
ROBERT BRUNNER

MODEL

White Glass w/ Stainless Steel	ALA-M90BW X	ALA-E42BW X
Black Glass w/ Stainless Steel	ALA-M90BB X	ALA-E42BB X
Size	90cm (35-3/8")	42"

PERFORMANCE

Internal Blower (CBI-290A)*	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA

FEATURES

Controls	Capacitive Touch	Capacitive Touch
Speed Levels	3	3
Auto Delay-Off	Yes	Yes
CleanAir Function**	Yes	Yes
Lighting	LED Strip x 2 (6W)	LED Strip x 2 (6W)
Tri-Level Lighting	Yes	Yes
Filters	Decorative Mesh x2	Decorative Mesh x2
Wireless Remote Control	Yes, RF	Yes, RF
Recirculating	Yes	Yes
Extension Duct Cover	Yes	Yes
ADA Compliant	Yes	Yes

DUCT SPECIFICATIONS

Vertical Internal Blower	6"	6"
Vertical In-Line/External Blower	10" to 8"***	10" to 8"***
Horizontal	NA	NA

AC POWER

Hood w/ CBI-290A	120V, 60Hz, Max. 1.05A	120V, 60Hz, Max. 1.05A
Hood w/ CBI-600A	120V, 60Hz, Max. 3.05A	120V, 60Hz, Max. 3.05A
Hood w/ PBN-1000A	120V, 60Hz, Max. 5.75A	120V, 60Hz, Max. 5.75A
Hood w/ CBE-1000	120V, 60Hz, Max. 6.55A	120V, 60Hz, Max. 6.55A

OPTIONAL ACCESSORIES

Recirculating Kit	ZRC-01LA	ZRC-01LA
Extension Duct Cover	Z1C-00LA (up to 12' ceiling)	Z1C-00LA (up to 12' ceiling)
Make-Up Air Kit	MUA006A (600 CFM)	MUA006A (600 CFM)
	MUA008A (1,000 CFM)	MUA008A (1,000 CFM)

MOUNTING HEIGHT RANGE†	24" - 36"	24" - 36"
------------------------	-----------	-----------

WARRANTY	1 year parts, 1 year labor	1 year parts, 1 year labor
----------	----------------------------	----------------------------

CEILING HEIGHT	8'	8.5'	9'	9.5'	10'	10.5'	11'	12'	
STANDARD DUCT COVER	Ducted Mounting Height†	24" - 32"	24" - 36"	24" - 36"	28" - 36"	34" - 36"	NA	NA	NA
	Recirc. Mounting Height†	24" - 29"	24" - 35"	24" - 36"	28" - 36"	34" - 36"	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height†	NA	NA	NA	24" - 32.5"	24" - 36"	24" - 36"	24" - 36"	24" - 36"
	Recirc. Mounting Height†	NA	NA	NA	24" - 29.5"	24" - 35.5"	24" - 36"	24" - 36"	24" - 36"

*Blower sold separately.

**CleanAir turns your hood on once every four hours for 10 minutes on speed one.

***10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

†Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.