

DESIGNER:
FU-TUNG CHENG






Shown in Stainless Steel



Shown in Brushed Gold



Optional Wireless Remote Control

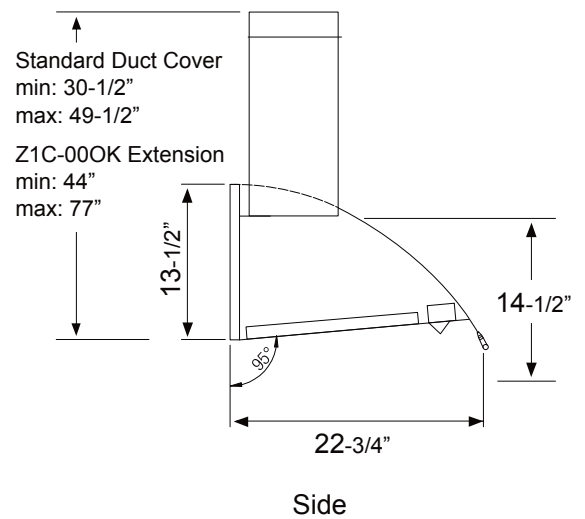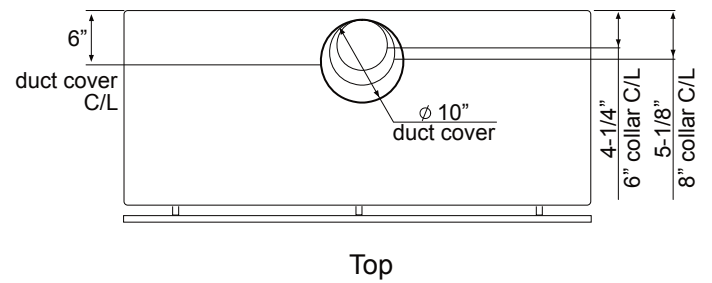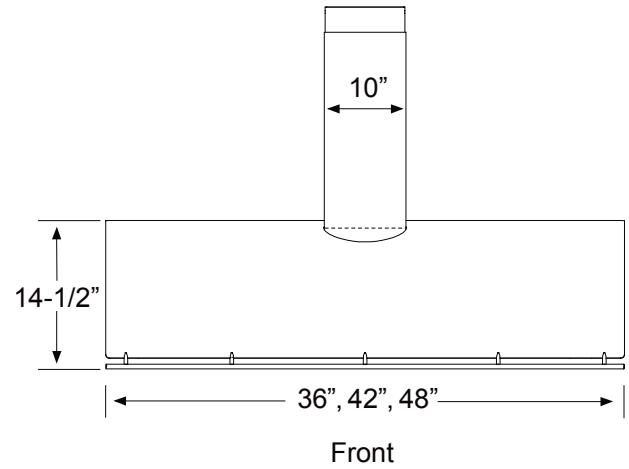

DESIGNER:
FU-TUNG CHENG

MODEL

Brushed Gold	COK-E36CBGX	COK-E42CBGX	COK-E48CBGX
Stainless Steel	COK-E36CSX	COK-E42CSX	COK-E48CSX
Size	36"	42"	48"

PERFORMANCE

Internal Blower (CBI-290C)*	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones	200-290 CFM, 1.4-3 sones
Internal Blower (CBI-390A)*	200-390 CFM, 1.4-5 sones	200-390 CFM, 1.4-5 sones	200-390 CFM, 1.4-5 sones
Internal Blower (CBI-600A)*	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones	240-600 CFM, 1.8-6 sones
In-Line Blower (PBN-1000A)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA
External Blower (CBE-1000)*	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA	500-1,000 CFM, sones NA

FEATURES

Controls	Electronic Touch Controls	Electronic Touch Controls	Electronic Touch Controls
Speed Levels	3	3	3
Auto Delay-Off	Yes	Yes	Yes
Directional Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x4
Ambient Lighting	LED, 4W x2	LED, 4W x2	LED, 4W x4
Tri-Level Lighting	Yes, LumiLight LED	Yes, LumiLight LED	Yes, LumiLight LED
Filters	Professional Baffle	Professional Baffle	Professional Baffle
Wireless Remote Control Option	Yes, RF	Yes, RF	Yes, RF
Recirculating Option	No	No	No
Extension Duct Cover	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling
ADA Compliant	Yes (with remote accessory)	Yes (with remote accessory)	Yes (with remote accessory)

DUCT SPECIFICATIONS

Vertical - Internal Blower	6" Round	6" Round	6" Round
Vertical - External/In-Line Blower	10" - 8"***	10" - 8"***	10" - 8"***
Horizontal	NA	NA	NA

AC POWER

Hood w/ CBI-290C	120V, 60Hz, Max. 1.35A	120V, 60Hz, Max. 1.35A	120V, 60Hz, Max. 1.35A
Hood w/ CBI-390A	120V, 60Hz, Max. 2.1A	120V, 60Hz, Max. 2.1A	120V, 60Hz, Max. 2.1A
Hood w/ CBI-600A	120V, 60Hz, Max. 3.35A	120V, 60Hz, Max. 3.35A	120V, 60Hz, Max. 3.35A
Hood w/ PBN-1000A	120V, 60Hz, Max. 6.05A	120V, 60Hz, Max. 6.05A	120V, 60Hz, Max. 6.05A
Hood w/ CBE-1000	120V, 60Hz, Max. 6.85A	120V, 60Hz, Max. 6.85A	120V, 60Hz, Max. 6.85A

OPTIONAL ACCESSORIES

Extension Duct Cover	Z1C-000K	Z1C-000K	Z1C-000K
Make-Up Air Kit	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)	MUA006A (600 CFM) MUA008A (1,000CFM)
Wireless Remote Control	14000005	14000005	14000005

MOUNTING HEIGHT RANGE***	26" - 36"	26" - 36"	26" - 36"
--------------------------	-----------	-----------	-----------

WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor
----------	-----------------------------	-----------------------------	-----------------------------

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	26" - 30"	26" - 36"	26" - 36"	26" - 36"	32" - 36"	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height***	NA	NA	26" - 28"	26" - 34"	26" - 36"	26" - 36"	26" - 36"	30" - 36"

*Blower sold separately.

**10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.