

COOKING

HYPERCORE™

INDUCTION COOKTOP

The HyperCore™ Induction Cooktop brings powerful, precision cooking to your kitchen — driven by four ultra-high-power 10 kW heating elements, each delivering the equivalent of a 72,000 BTU gas burner. All this while still being compatible with a standard 120V

outlet for quick, easy installation. A built-in battery works behind the scenes to support peak performance, and magnetic knobs make clean-up a breeze. With intuitive dual cooking modes and a sleek design, HyperCore is built to make life (and cooking!) a breeze.

ZEPHYR




ZEPHYRONLINE.COM



30"



36"

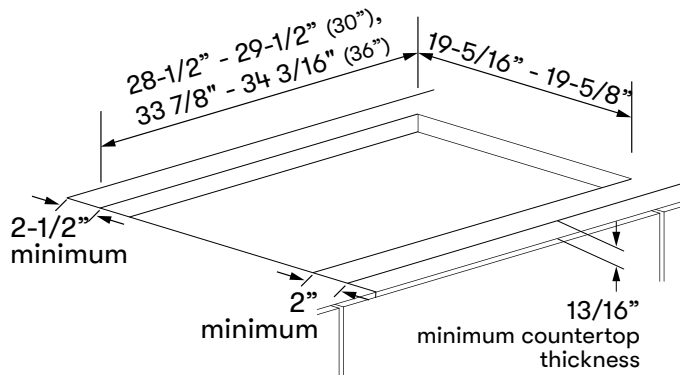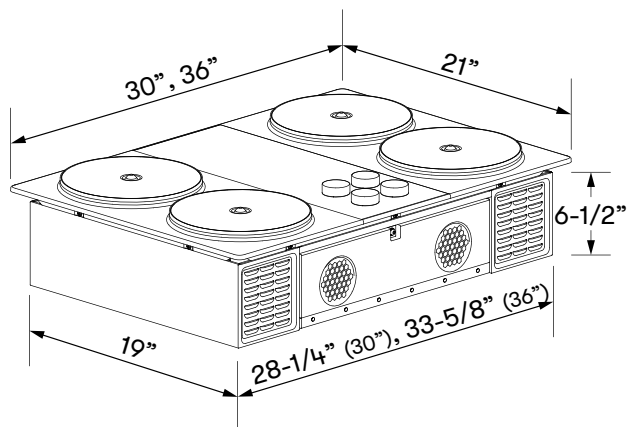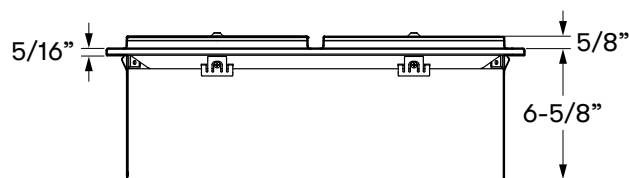

How HyperCore™ Stands Out:



Unmatched Power

Each 10kW element is the equivalent of a 72,000 BTU gas burner, 4x more powerful than traditional gas and 3x more powerful than traditional induction.



Precision Temperature Control

Cook with single degree-level temperature control from 68° - 482°F. That's more precise than an oven, but on your cooktop.



Intuitive Interface

A 12.8-inch display provides a clear view of the cooking mode, while removable magnetic knobs simplify cleanup and improve safety.



Easy Install

The HyperCore cooktop fits into 95% of existing cooktop openings. Due to the integrated 3 kWh battery, the cooktop can be plugged into a 120V or 240V outlet. No electrician needed.

MODEL

Induction Cooktop	ZHCT130AC	ZHCT136AC
Overall Width	30"	36"
Overall Depth	21"	21"
Overall Height		
• Above surface of countertop	15/16"	15/16"
• Below surface of countertop	6-1/2"	6-1/2"
BATTERY, REQUIRED	ZHB13A	ZHB13A
Battery Type	Lithium Iron Phosphate (LFP)	Lithium Iron Phosphate (LFP)
Battery Capacity	3 kWh	3 kWh

SPECIFICATIONS

Color	Charcoal	Charcoal
Weight with battery (net)	159lbs.	172lbs.
Heating Element Quantity	4	4
Heating Element Diameter	9"	9"
Max Power Capacity	10 kW per heating element	10 kW per heating element
Temperature Range	68°F - 482°F	68°F - 482°F
User Interface	12.8" Display	12.8" Display
	Removable Magnetic Knobs	Removable Magnetic Knobs
Wi-Fi Connectivity	Yes, with over the air updates	Yes, with over the air updates
Hot Surface Indicator	Yes, LED Element Rings (4)	Yes, LED Element Rings (4)

ENHANCED FEATURES

HyperBoost™

Instantly delivers maximum heat for rapid boiling and high-intensity cooking.

ExactTemp™

Cook in single-degree temperature increments for delicate tasks such as tempering chocolate, maintaining oil temperature, or cooking eggs to perfection.

SmartSense™

Proprietary sensor technology measures the temperature inside the pan rather than just the bottom of the pan. Measurements are taken multiple times per second to ensure accurate temperatures.

Dual Mode Controls

Cook in Power Mode (watts) for traditional low, medium, and high settings, or switch to Temperature Mode (°F) and cook in single-degree increments.

CUTOUT SIZE

Cutout Width	28 1/2" - 29 1/2"	33 7/8" - 34 3/16"
Cutout Depth	19 5/16" - 19 5/8"	19 5/16" - 19 5/8"
Clearance from Rear Wall	2 1/2" [minimum]	2 1/2" [minimum]
Clearance from Front Edge of Counter	2" [minimum]	2" [minimum]

WARRANTY	2 years parts, 2 years labor, 10 years battery	2 years parts, 2 years labor, 10 years battery
----------	--	--

ELECTRICAL SPECIFICATIONS

120V* vs. 240V

	120V	240V
Max Appliance Current Rating	12.5A	8.3A
Max Connected Load	1.5 kW	2 kW
Max Overcurrent Protective Device (OCPD) Rating	20A	30A
Frequency	60Hz	60Hz

*59" long 120V power cord is pre-installed.

Powered by **impulse**

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

NOV25.0101

