

ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
		200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 650		
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	1 - 7		
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	400 - 1,200		
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	3 - 10		

*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.




Shown with optional 12" duct cover




Shown with optional 24" duct cover




Optional Wireless Remote Control

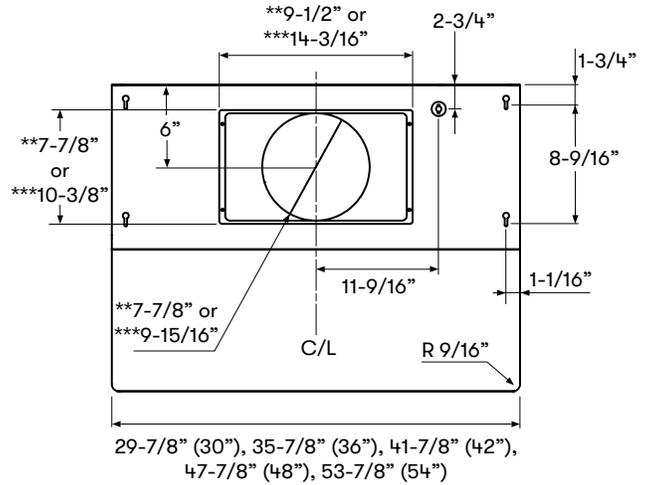

TOP

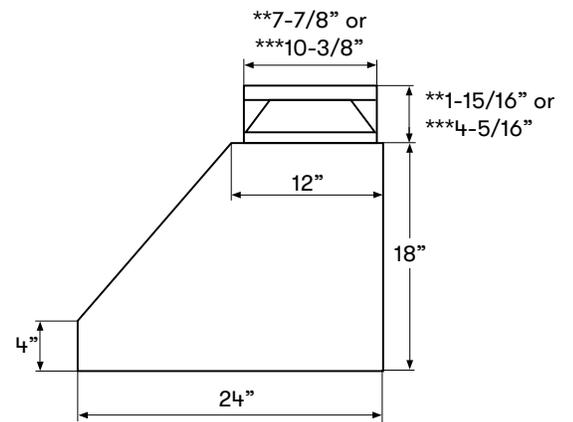

SIDE

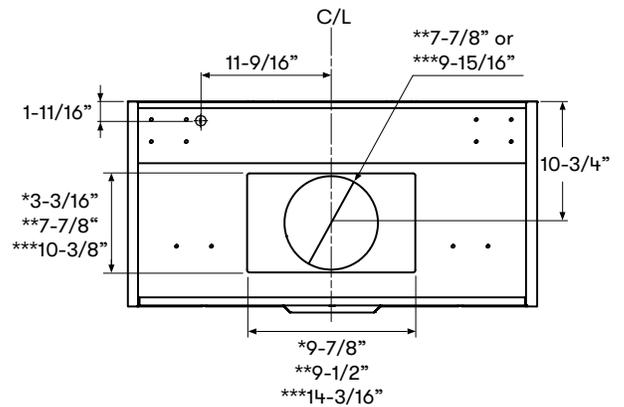

BACK

* Single Blower Rect. Ducting Dimension
 ** Single Blower Round Ducting Dimension
 *** Dual Blower Dimension

MODEL

Stainless Steel	AK7500DS	AK7536DS/AK7542DS	AK7548DS/AK7554DS
Size	30"	36"/42"	48"/54"

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)	200 - 650	200 - 650	200 - 650
Sones (Min. - Max.)	1 - 7	1 - 7	1 - 7
ACT 390 CFM (Min. - Max.)*	200 - 390	200 - 390	200 - 390
ACT 290 CFM (Min. - Max.)*	200 - 290	200 - 290	200 - 290
Optional Dual Blower	400 - 1,200	400 - 1,200	400 - 1,200
Dual Blower Sones (Min. - Max.)	3 - 10	3 - 10	3 - 10

FEATURES

ACT™ Technology	390, 290, Single Blower Only	390, 290, Single Blower Only	390, 290, Single Blower Only
Controls	Electronic LCD	Electronic LCD	Electronic LCD
Speed Levels	5**	5**	5**
Auto Delay-Off	Yes	Yes	Yes
CleanAir Function	Yes	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x4
Dual-Level Lighting	Yes	Yes	Yes
TruHue™	Yes	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x2	Pro Baffle x3
Wireless Remote Control Option	Yes, RF	Yes, RF	Yes, RF
Dual Internal Blower Option	Yes	Yes	Yes
Recirculating Option***	Yes, Single Blower Only	Yes, Single Blower Only	NA
ADA Compliant	Yes (with remote accessory)	Yes (with remote accessory)	Yes (with remote accessory)

DUCT SPECIFICATIONS

Vertical Single Internal Blower	8" Round	8" Round	8" Round
Horizontal Single Internal Blower	3-1/4" x 10" or 8" Round	3-1/4" x 10" or 8" Round	3-1/4" x 10" or 8" Round
Vertical Dual Internal Blower	10" Round	10" Round	10" Round
Horizontal Dual Internal Blower	10" Round	10" Round	10" Round

AC POWER (Single Blower)	120V, 60Hz, Max. 5A	120V, 60Hz, Max. 5A	120V, 60Hz, Max. 5A
AC POWER (Dual Blower)	120V, 60Hz, Max. 9A	120V, 60Hz, Max. 9A	120V, 60Hz, Max. 9A

OPTIONAL ACCESSORIES

12" Duct Cover	AK0720	AK0726/AK0722	AK0728/AK0724
24" Duct Cover	AK1720	AK1726/AK1722	AK1728/AK1724
Wireless Remote Control	RC-0002	RC-0002	RC-0002
Dual Internal Blower Kit	PBD-1200B	PBD-1200B	PBD-1200B
Recirculating Kit	ZRC-7000C	ZRC-7036C/ZRC-7042C	ZRC-7048C/NA
Stainless Steel Telescopic Backsplash	AK1710	AK1716/AK1712	AK1718/AK1714
Make-Up Air Kit (Single Blower)	MUA008A	MUA008A	MUA008A
Make-Up Air Kit (Dual Blower)	MUA010A	MUA010A	MUA010A

MOUNTING HEIGHT RANGE†	26" - 36"	26" - 36"	26" - 36"
------------------------	-----------	-----------	-----------

WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor
----------	-----------------------------	-----------------------------	-----------------------------

*ACT is only available with a single internal blower

**When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.



Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

MAR26.0101

