



	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 650	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	1 - 8	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	400 - 1,200		
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	3 - 11		



Optional Wireless Remote Control


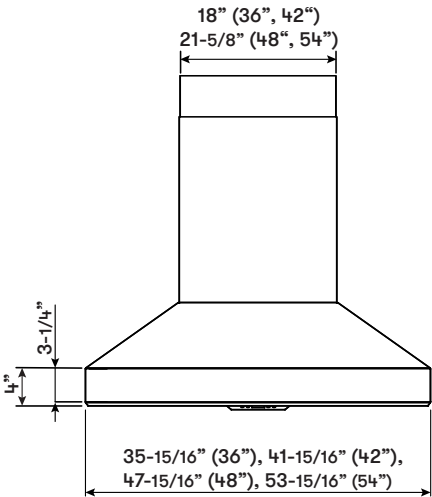


FRONT

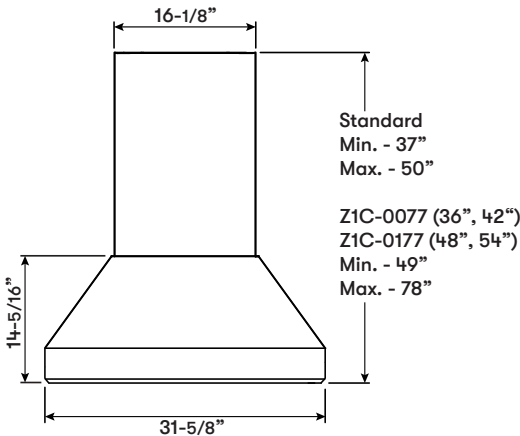

SIDE

Top Support Frame - top view

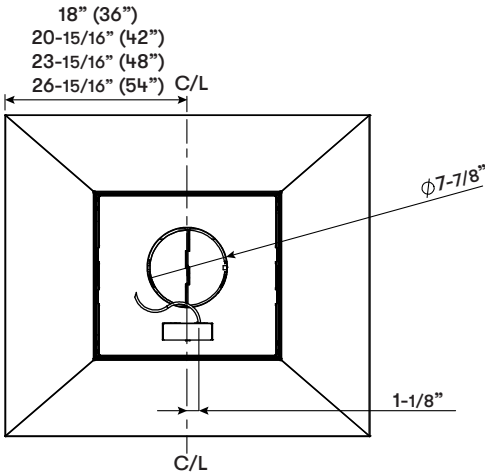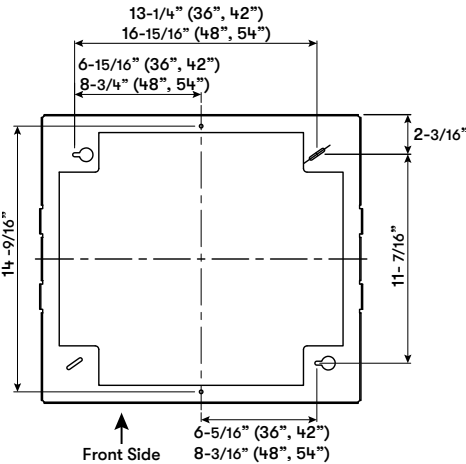

TOP

MODEL

Stainless Steel
SizeAK7736CS/AK7742CS
36"/42"AK7748CS/AK7754CS
48"/54"

BLOWER PERFORMANCE

Included Single Blower
ACT 390 CFM (Min. - Max.)*
ACT 290 CFM (Min. - Max.)*
Optional Dual Blower200-650 CFM, 1-8 Sones
200-390 CFM
200-290 CFM
400-1,200 CFM, 3-11 Sones200-650 CFM, 1-8 Sones
200-390 CFM
200-290 CFM
400-1,200 CFM, 3-11 Sones

FEATURES

ACT™ Technology

390, 290,
Single Blower Only
Electronic LCD390, 290,
Single Blower Only
Electronic LCD

Controls

Speed Levels

Auto Delay-Off

CleanAir Function

Lighting

Dual-Level Lighting

Directional Lighting

TruHue™

Filters

Grease Collection Tray

Wireless Remote Control

Recirculating Option

Duct Cover Extension Option

ADA Compliant

Pro Baffle x4

Yes

Yes

Yes

Yes

Yes

Yes (w/ remote accessory)

Pro Baffle x6

Yes

Yes

Yes

Yes

Yes

Yes (w/ remote accessory)

DUCT SPECIFICATIONS

Vertical Single Internal Blower

8" Round

8" Round

Horizontal Single Internal Blower

NA

NA

Vertical Dual Internal Blower

10" Round

10" Round

Horizontal Dual Internal Blower

NA

NA

AC POWER (Single Blower)

120V, 60Hz at Max. 5A

120V, 60Hz at Max. 5A

AC POWER (Dual Blower)

120V, 60Hz at Max. 9A

120V, 60Hz at Max. 9A

OPTIONAL ACCESSORIES

Wireless Remote Control Kit

RC-0002

RC-0002

Dual Internal Blower

PBD-1200B

PBD-1200B

Duct Cover Extension

Z1C-0077

Z1C-0177

Make-Up Air Kit (Single Blower)

MUA008A

MUA008A

Make-Up Air Kit (Dual Blower)

MUA010A

MUA010A

MOUNTING HEIGHT RANGE***

24" - 36"

24" - 36"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

CEILING HEIGHT

8'

8.5'

9'

9.5'

10'

10.5'

11'

12'

STANDARD
DUCT COVER

Ducted Mounting Height***

24" - 28"

24" - 34"

24" - 36"

28" - 36"

34" - 36"

NA

NA

NA

DUCT COVER
EXTENSION

Ducted Mounting Height***

NA

NA

NA

24" - 29"

24" - 35"

24" - 36"

24" - 36"

30" - 36"

*ACT™ only available with single internal blower.

**When ACT is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.

ACT™

Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.