

CORE

VETRO


UNDER-CABINET

ZEPHYR


ZEPHYRONLINE.COM

ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	290 - 600	290 - 390	290 - 290
Min. - Max. Sones	2 - 7	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	

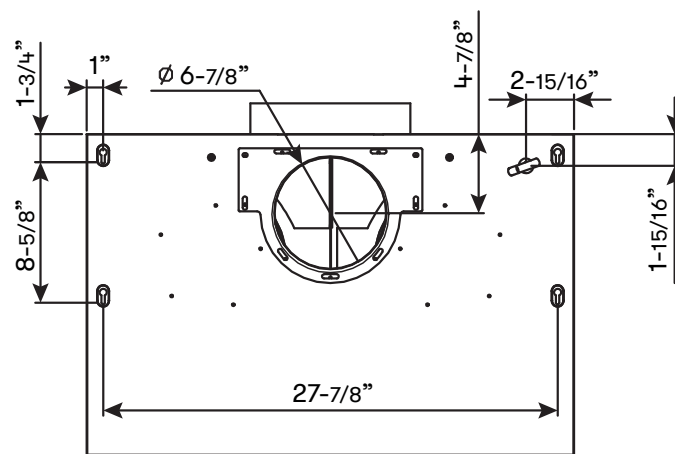


TOP

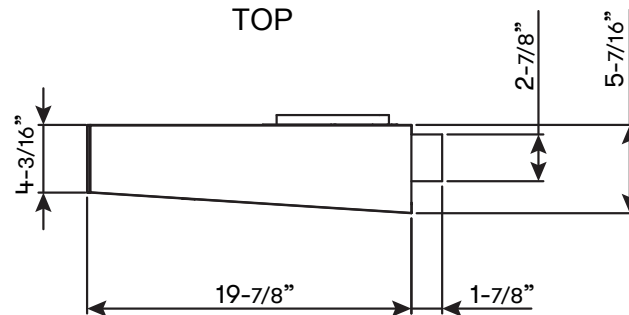

SIDE

Stainless Steel with Black Glass

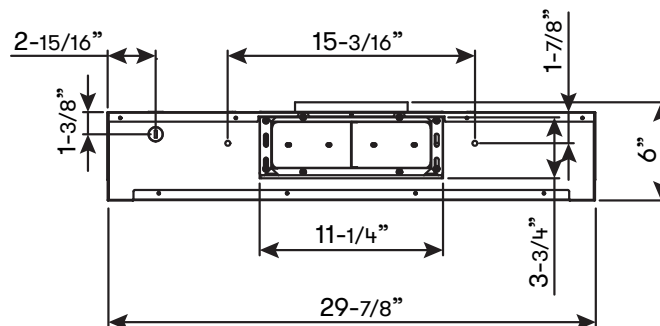

BACK

Stainless Steel with Stainless Glass

MODEL

Stainless Steel w/ Black Glass	ZVT-E30ABG
Stainless Steel w/ Stainless Glass	ZVT-E30ASG
Size	30"

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)	290 - 600
Sones (Min. - Max.)	2 - 7
ACT 390 CFM (Min. - Max.)	290 - 390
ACT 290 CFM (Min. - Max.)	290 - 290

FEATURES

ACT™ Technology	390, 290
Controls	Capacitive Touch
Speed Levels	3*
Auto Delay-Off	Yes
Lighting	LumiLight LED, 6W x2
Dual-Level Lighting	Yes
Filters	Hybrid Baffle x2
ADA Compliant	Yes, w/ remote accessory

DUCT SPECIFICATIONS

Vertical Internal Blower	7" Round or 3-1/4" x 10"
Horizontal Internal Blower	3-1/4" x 10"
AC POWER	120V, 60Hz at Max. 5A

OPTIONAL ACCESSORIES

Wireless Remote Control Kit	RC-0002
Stainless Steel Telescopic Backsplash	AK1710
Make-Up Air Kit	MUA006A
Damper, 7" Round	AK00067

MOUNTING HEIGHT RANGE**	24" - 32"
--------------------------------	------------------

WARRANTY	3 years parts, 1 year labor
-----------------	------------------------------------

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 2 speeds and ACT 290 CFM = 1 speed.

**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

ACT™ Airflow Control Technology™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.