



# ELICA


COLLECTION

## OPTICA ISLAND

This energetic and inspired take on island hood design ushers the daring asymmetry of the Optica wall unit to the next level. Here, the steel is fashioned into a zig-zag pattern which sets the senses into motion and is sure to delight guests with an unexpected, yet entirely welcome, twist. The design integrates two sheets of tempered glass with a quartet of halogens to evoke a distinctive air of lightness and finely tuned balance.



# ELICA COLLECTION

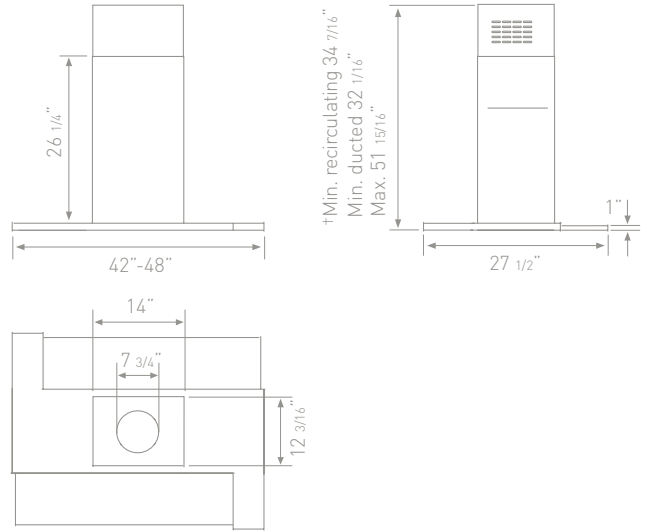

\*Ductless (Recirculating); louver holes exposed.  
Note: if necessary order the proper duct cover extension kit.

## OPTICA

ISLAND

MODEL	EOT-E42ASX	EOT-E48ASX
<b>SIZE</b>	42"	48"
<b>NET WIDTH</b>	41 7/8"	47 7/8"
<b>*PERFORMANCE</b>		
Internal Blower CFM	600	600
**In-Line Blower CFM	1100	1100
Sones (Internal Blower)	9	9
<b>COLOR/FINISH</b>		
Stainless Steel w/Glass	S	S
<b>FEATURES &amp; ACCESSORIES</b>		
Controls	Soft Touch	Soft Touch
Speed Levels	3	3
Boost Speed	No	No
Lighting	Halogen 20w 12v x 4	Halogen 20w 12v x 4
Dual Level Lighting	No	No
RF Remote	No	No
Passive Silencer	Yes	Yes
<b>DUCT SPECIFICATIONS</b>		
**Ducting	8"	8"
Recirculating	Yes	Yes
Duct Cover Extension Option (up to 12' ceiling)	Yes	Yes

**Mounting Heights (Ducted)**  
(Louver holes hidden)

Min. ceiling height 7'7". Hood mounted 24" above cooking surface; 60" from floor.

Max. ceiling height 9'10". Hood mounted 32" above cooking surface; 68" from floor.

**Mounting Heights (Recirculating)**  
(Louver holes exposed)

Min. ceiling height 7'8". Hood mounted 24" above cooking surface; 60" from floor.

Max. ceiling height 9'10". Hood mounted 32" above cooking surface; 68" from floor.

\* Blowers not included with hoods, order blower option separately. \*\* Run 10" round duct work from in-line blower to the ceiling bracket. Before duct work passes through the ceiling bracket, use a 10" to 8" transition adaptor (included) and run 8" duct.